



BABYLA

GOLD POLISHED STAINLESS STEEL

design **Mariano Moroni**



5 YEARS WARRANTY

MATERIAL:

Vertical collectors in polished stainless steel with $\varnothing$ of 38 mm.
Horizontal heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES




P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

ACCESSORIES



Elegant square gold polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection $\varnothing$ 12/14/15
Art. Nr. 5991990301089

Multilayer connection $\varnothing$ 16 x2
Art. Nr. 5991990301091



Elegant square polished manual gold valve kit


Copper connection $\varnothing$ 12/14/15
Art. Nr. 5991990301056

Multilayer connection $\varnothing$ 16 x2
Art. Nr. 5991990301055










Pipe covering kit for Pipe Centres 50 mm polished valves gold

Art. Nr. 5103000000087



Measures for valves type
Cordivari Elegant Square
with thermostatic head and
pipe centres 50 mm

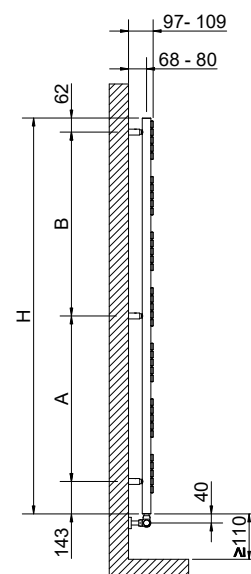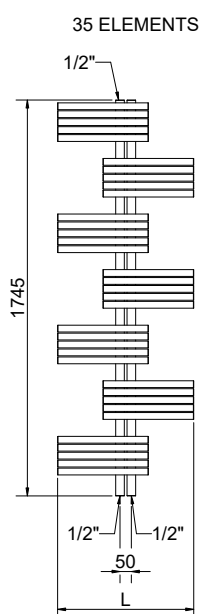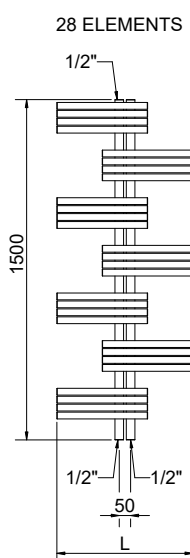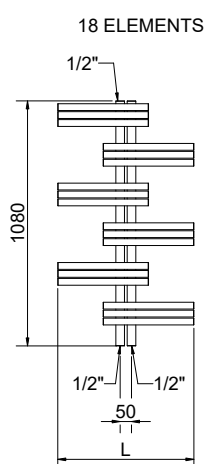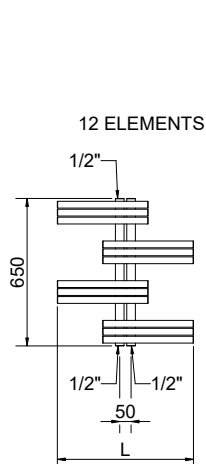

H [mm]	A [mm]	B [mm]
650	445	-
1080	397	478
1500	607	688
1745	731	810

BABYLA GOLD POLISHED STAINLESS STEEL

Art. Nr.	Height	Width	Pipe Centres	Fixing kit centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	I [mm]	F [mm]	[Kg]	[m ²]	[lt]	Δt = 50°C	Δt = 30°C	
3551730130024	650	600	50	445	5,5	0,51	2,3	156	83	1,2246
3551730130021	1080	600	50	875	9,2	0,83	3,4	233	124	1,2351
3551730130022	1500	600	50	1275	13,3	1,25	4,5	333	174	1,2687
3551730130023	1745	600	50	1540	16,9	1,53	6,0	395	204	1,2904

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ