



CELINE

POLISHED STAINLESS STEEL



10 YEARS WARRANTY

MATERIAL:

Vertical collectors in polished stainless steel with \varnothing of 38 mm.
Horizontal heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 2 x G 1/2"

REVERSIBLE



ACCESSORIES



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301076

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301075



Elegant reverse manual polished valve kit

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301082


Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301081



Elegant square polished manual valve kit

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301084

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301083











Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm



Pipe covering kit for Pipe Centres 50 mm polished valves

Art. Nr. 5103000000057

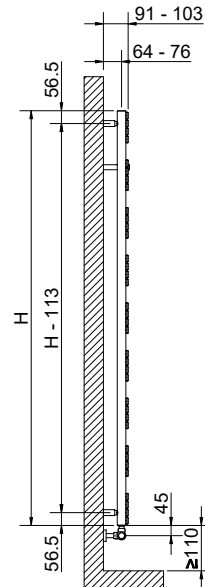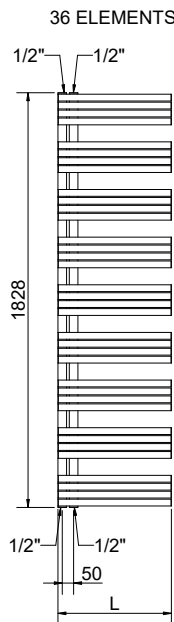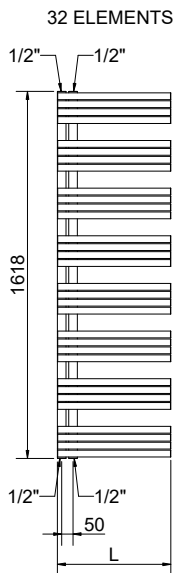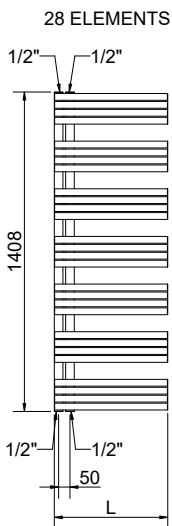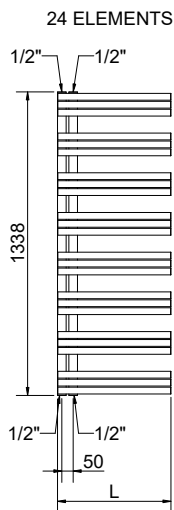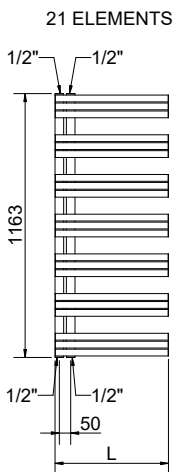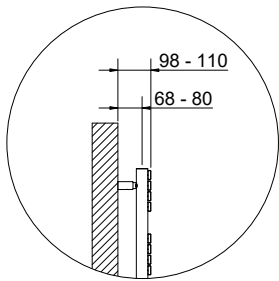

CELINE POLISHED STAINLESS STEEL

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	l [mm]				$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3551730130101	1163	500	50	10,0	1,118	4,5	294	148	1,3462
3551730130102	1338	500	50	11,6	1,203	5,2	337	169	1,3537
3551730130105	1408	500	50	12,6	1,456	5,7	393	197	1,3549
3551730130103	1618	500	50	14,8	1,666	6,5	449	224	1,3592
3551730130104	1828	500	50	16,7	1,876	7,4	506	252	1,3621

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t 50^{\circ}\text{C}$ x (desired $\Delta t/50$)ⁿ