



# CELINE

POLISHED STAINLESS STEEL

**10 YEARS  
WARRANTY**

**MATERIAL:**

Vertical collectors in polished stainless steel with  $\varnothing$  of 38 mm.  
Horizontal heating elements in polished stainless steel 30x10 mm.

**FIXING KIT:**

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

**PACKAGING:**

The radiator is protected by a film in polyethylene and with a carton box.  
Use and maintenance notice included.

**FEATURES:**

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.  
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 2 x G 1/2"

REVERSIBLE



ACCESSORIES



**Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right**

Copper connection  $\varnothing$  12/14/15  
Art. Nr. 5991990301076

Multilayer connection  $\varnothing$  16 x2  
Art. Nr. 5991990301075



**Elegant reverse manual polished valve kit**

Copper connection  $\varnothing$  12/14/15  
Art. Nr. 5991990301082


Multilayer connection  $\varnothing$  16 x2  
Art. Nr. 5991990301081



**Elegant square manual polished valve kit**

Copper connection  $\varnothing$  12/14/15  
Art. Nr. 5991990301084

Multilayer connection  $\varnothing$  16 x2  
Art. Nr. 5991990301083











Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm



**Pipe covering kit for Pipe Centres 50 mm - valves polished**

Art. Nr. 5103000000057

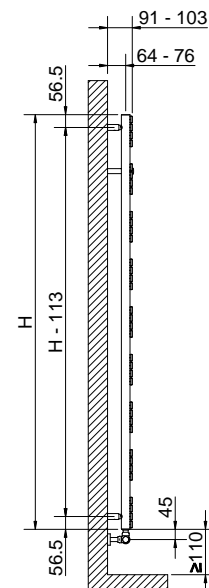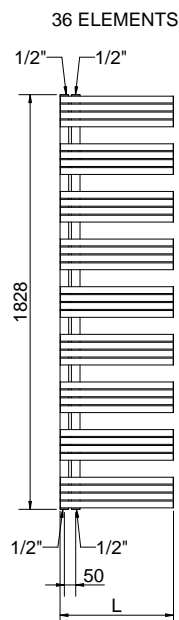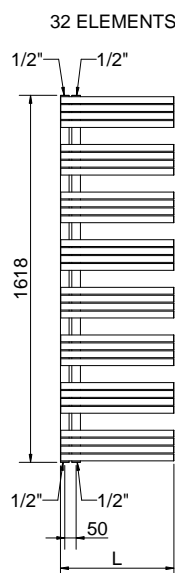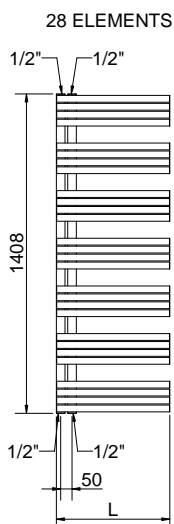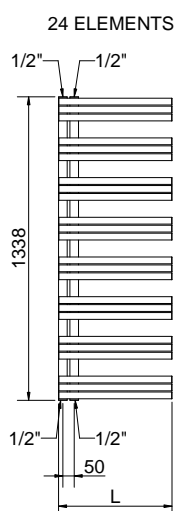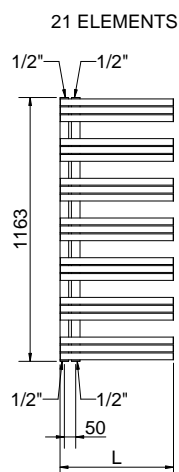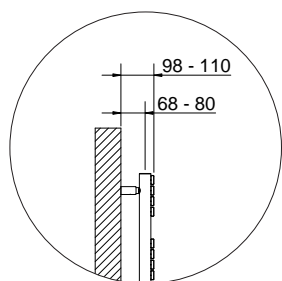

## CELINE POLISHED STAINLESS STEEL

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	l [mm]				$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3551730130101	<b>1163</b>	500	50	10,0	1,118	4,5	294	148	1,3462
3551730130102	<b>1338</b>	500	50	11,6	1,203	5,2	337	169	1,3537
3551730130105	<b>1408</b>	500	50	12,6	1,456	5,7	393	197	1,3549
3551730130103	<b>1618</b>	500	50	14,8	1,666	6,5	449	224	1,3592
3551730130104	<b>1828</b>	500	50	16,7	1,876	7,4	506	252	1,3621

For output at different  $\Delta t$  than  $50^{\circ}\text{C}$ , please refer to the following formula = desired output = output at  $\Delta t 50^{\circ}\text{C} \times (\text{desired } \Delta t/50)^n$