



GIULY® SL

design **Mariano Moroni**

PATENTED

**5 YEARS
WARRANTY**

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES:

Valves

Fittings for copper pipe (Ø 12/14/15)

Fittings for multilayer pipe (Ø 16 x2)

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.

For other colours see colour chart.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems







Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

AWARD




product
design award



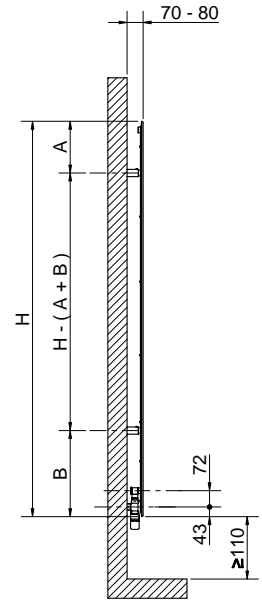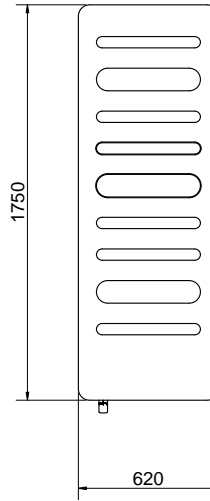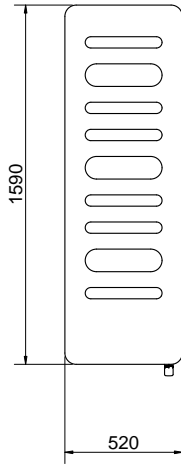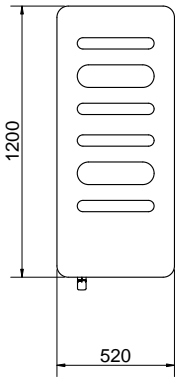

CONNECTION detail



H [mm]	A [mm]	B [mm]	l (*) [mm]
1200	218	222	400
1590	218	362	400
1750	229	381	505

GIULY® SL

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	l [mm]	[Kg]	[m ²]	[lt]	$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3540806100222	1200	520	400	16	0,90	0,90	521	274	1,2603
3540806100223	1590	520	400	20	1,16	1,16	714	377	1,2518
3540806100225	1750	620	500	26	1,50	1,50	900	467	1,2849

Art. Nr. are referred to WHITE R01 colour version.

Art. Nr. is inclusive of **VALVE AND HOLDER**.

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t 50^{\circ}\text{C} \times (\text{desired } \Delta t / 50)^n$