



KELLY 18

POLISHED STAINLESS STEEL



10 YEARS WARRANTY

MATERIAL:

Vertical collectors in polished stainless steel with \varnothing of 38 mm.
Horizontal heating elements in polished stainless steel with \varnothing of 18 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.
Models are NF certificate, except width 400 mm.

PRODUCT CERTIFICATES



P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 4 x G 1/2"

REVERSIBLE



ACCESSORIES



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301076

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301075



Elegant square polished manual valve kit


Copper connection \varnothing 12/14/15
Art. Nr. 5991990301084

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301083





Pipe covering kit for Pipe Centres 50 mm polished valves

Art. Nr. 5103000000057



Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

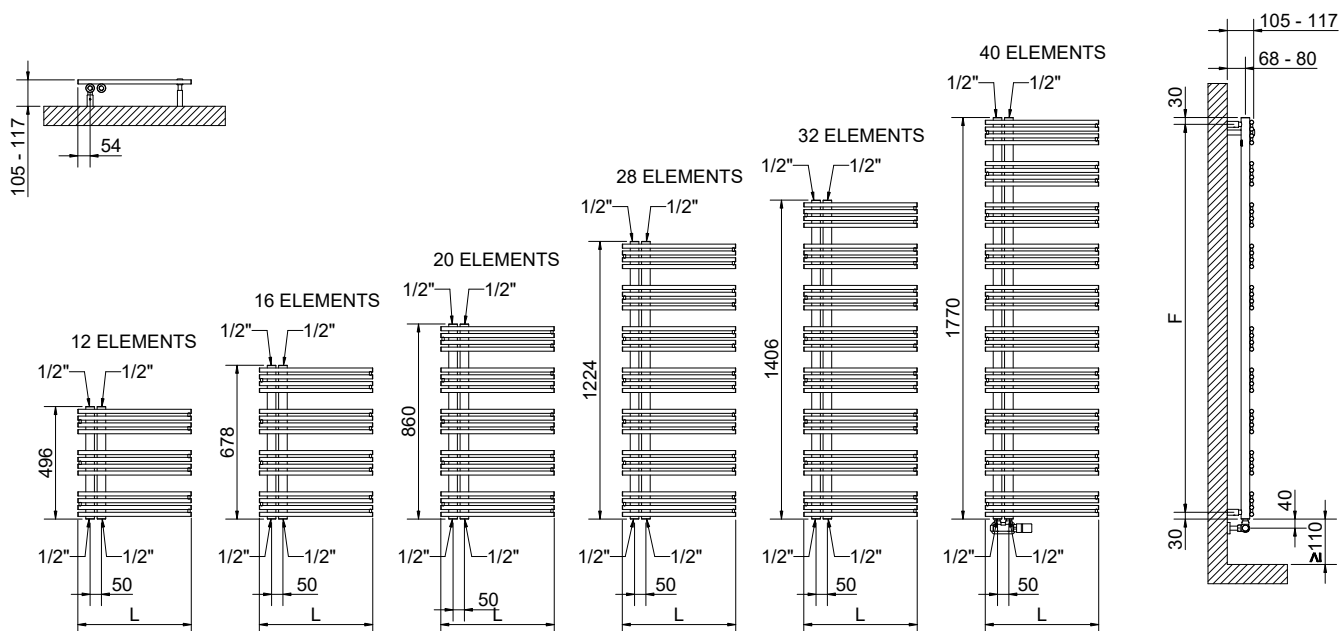

KELLY 18 POLISHED STAINLESS STEEL

Art. Nr.	Height	Width	Pipe Centres	Fixing kit centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	I [mm]	F [mm]	[Kg]	[m ²]	[lt]	$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3551780400104	500	400	50	436	3,8	0,39	1,87	166	90	1,1996
3551780400099		500	50	436	4,4	0,45	2,10	208	113	1,1996
3551780400105	680	400	50	618	5,01	0,52	2,52	214	116	1,1996
3551780400107		500	50	618	5,81	0,61	2,83	259	139	1,2117
3551780400106	860	400	50	800	6,3	0,65	3,18	283	152	1,2118
3551780400100		500	50	800	7,3	0,77	3,60	323	168	1,2771
3551780400101	1224	500	50	1164	10,27	1,08	5,03	434	225	1,2881
3551780400111		600	50	1164	11,66	1,24	5,56	504	261	1,2851
3551780400102	1406	500	50	1346	11,76	1,24	5,76	489	256	1,2692
3551780400112		600	50	1346	13,3	1,42	6,30	584	303	1,2862
3551780400103	1770	500	50	1710	14,75	1,55	7,20	624	321	1,2990
3551780400113		600	50	1710	16,7	1,78	7,90	726	377	1,2832

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t 50^{\circ}\text{C}$ x (desired $\Delta t/50$)ⁿ