# LOLA® HORIZONTAL

POLISHED STAINLESS STEEL

3D TRADEMARK

**10 YEARS** WARRANTY

**MATERIAL:**
Vertical collectors in polished stainless steel with Ø of 38 mm.
Curved heating elements in polished stainless steel 30x10 mm.

**FIXING KIT:**
Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

**PACKAGING:**
The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

**FEATURES:**
It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

## PRODUCT CERTIFICATES

P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2”- n° 1 x G 1/2”

## AWARD

**GOLD VILLA**
AWARD

## ACCESSORIES

**Elegant square polished manual valve kit**

Copper connection Ø 12/14/15
Art. Nr. 5991990301084

Multilayer connection Ø 16 x2
Art. Nr. 5991990301083

**Elegant reverse manual polished valve kit**

Copper connection Ø 12/14/15
Art. Nr. 5991990301082

Multilayer connection Ø 16 x2
Art. Nr. 5991990301081

**Kit 2 hooks polished stainless steel**

Art. Nr. 5991990010223

**H1÷H5**




Measures for Elegant square manual valve

**H1÷H5**




Measures for Elegant reverse manual valve

**Pipe covering kit for polished valves**

Art. Nr. 5103000000044

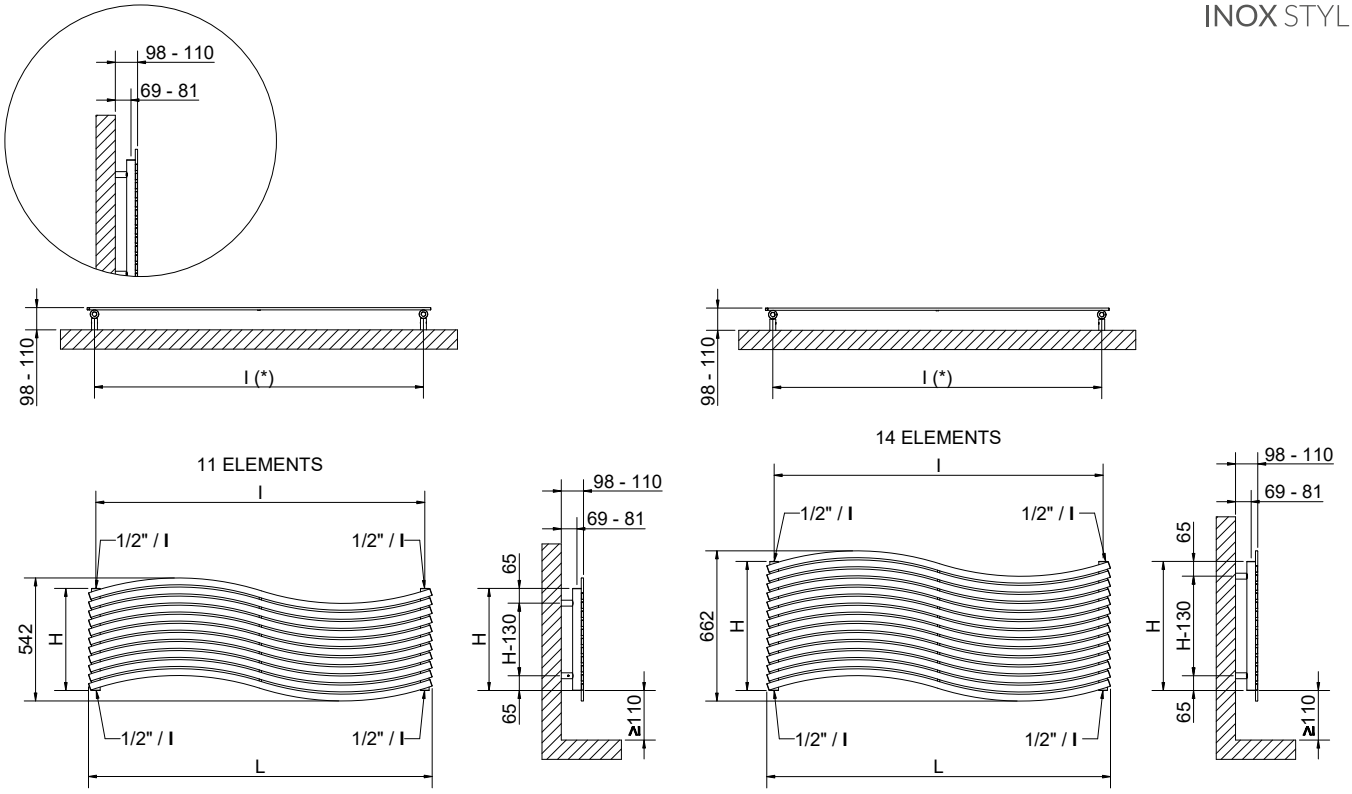


(*) The fixing kit has the same pipe centre (I) as the radiator

## Standard connections

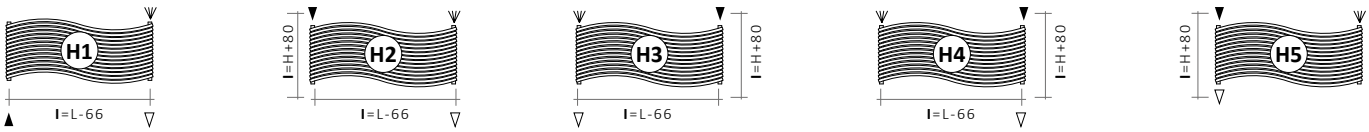





Always specify the kind of connection needed when ordering (from H1 to H7).

## Special connection

Indicate the pipe centres **X**




Legend = ► In ▷ Out ⋞ Airvent **H** Height **I** Pipe Centres **L** Width ▭ Connection

## LOLA® HORIZONTAL

| Art. Nr. | Variant | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---|---|---|---|---|---|---|---|---|---|---|
| | | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | **Δt = 50°C** | Δt = 30°C | |
| 3551740000005 | H1 | **450** | 1516 | 1450 | 15,5 | 1,45 | 4,1 | 484 | 254 | 1,2632 |
| 3551740000004 | | **570** | 1516 | 1450 | 19,0 | 1,84 | 5,1 | 616 | 321 | 1,2748 |
| 3551740000050 | H2 | **450** | 1516 | - | 15,5 | 1,45 | 4,1 | 484 | 254 | 1,2632 |
| 3551740000107 | | **570** | 1516 | - | 19,0 | 1,84 | 5,1 | 616 | 321 | 1,2748 |
| 3551740000108 | H3 | **450** | 1516 | - | 15,5 | 1,45 | 4,1 | 484 | 254 | 1,2632 |
| 3551740000095 | | **570** | 1516 | - | 19,0 | 1,84 | 5,1 | 616 | 321 | 1,2748 |
| 3551740000042 | H4 | **450** | 1516 | 530 | 15,5 | 1,45 | 4,1 | 484 | 254 | 1,2632 |
| 3551740000068 | | **570** | 1516 | 650 | 19,0 | 1,84 | 5,1 | 616 | 321 | 1,2748 |
| 3551740000080 | H5 | **450** | 1516 | 530 | 15,5 | 1,45 | 4,1 | 484 | 254 | 1,2632 |
| 3551740000058 | | **570** | 1516 | 650 | 19,0 | 1,84 | 5,1 | 616 | 321 | 1,2748 |
| 3551740000053 | H6 | **450** | 1516 | 390 | 15,5 | 1,45 | 4,1 | 484 | 254 | 1,2632 |
| 3551740000014 | | **570** | 1516 | 510 | 19,0 | 1,84 | 5,1 | 616 | 321 | 1,2748 |
| 3551740000051 | H7 | **450** | 1516 | 390 | 15,5 | 1,45 | 4,1 | 484 | 254 | 1,2632 |
| 3551740000055 | | **570** | 1516 | 510 | 19,0 | 1,84 | 5,1 | 616 | 321 | 1,2748 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n