LOLA® HORIZONTAL

SATIN STAINLESS STEEL

3D

10 YEARS WARRANTY

MATERIAL:
Vertical collectors in satin stainless steel with Ø of 38 mm.
Curved heating elements in satin stainless steel 30x10 mm.

FIXING KIT:
Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:
The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:
It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES

P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2”- n° 1 x G 1/2”

AWARD

GOLD VILLA
AWARD

ACCESSORIES

Elegant manual square satin valve

Copper connection Ø 12/14/15
Art. Nr. 5991990320209

Multilayer connection Ø 16 x2
Art. Nr. 5991990320208

Elegant manual reverse satin valve

Copper connection Ø 12/14/15
Art. Nr. 5991990320207

Multilayer connection Ø 16 x2
Art. Nr. 5991990320206

Kit 2 hooks satin stainless steel

Art. Nr. 5991990010224

H1÷H5



Measures for Elegant square manual valve

H1÷H5



Measures for Elegant reverse manual valve

Pipe covering kit for satin valves

Art. Nr. 5103000000045

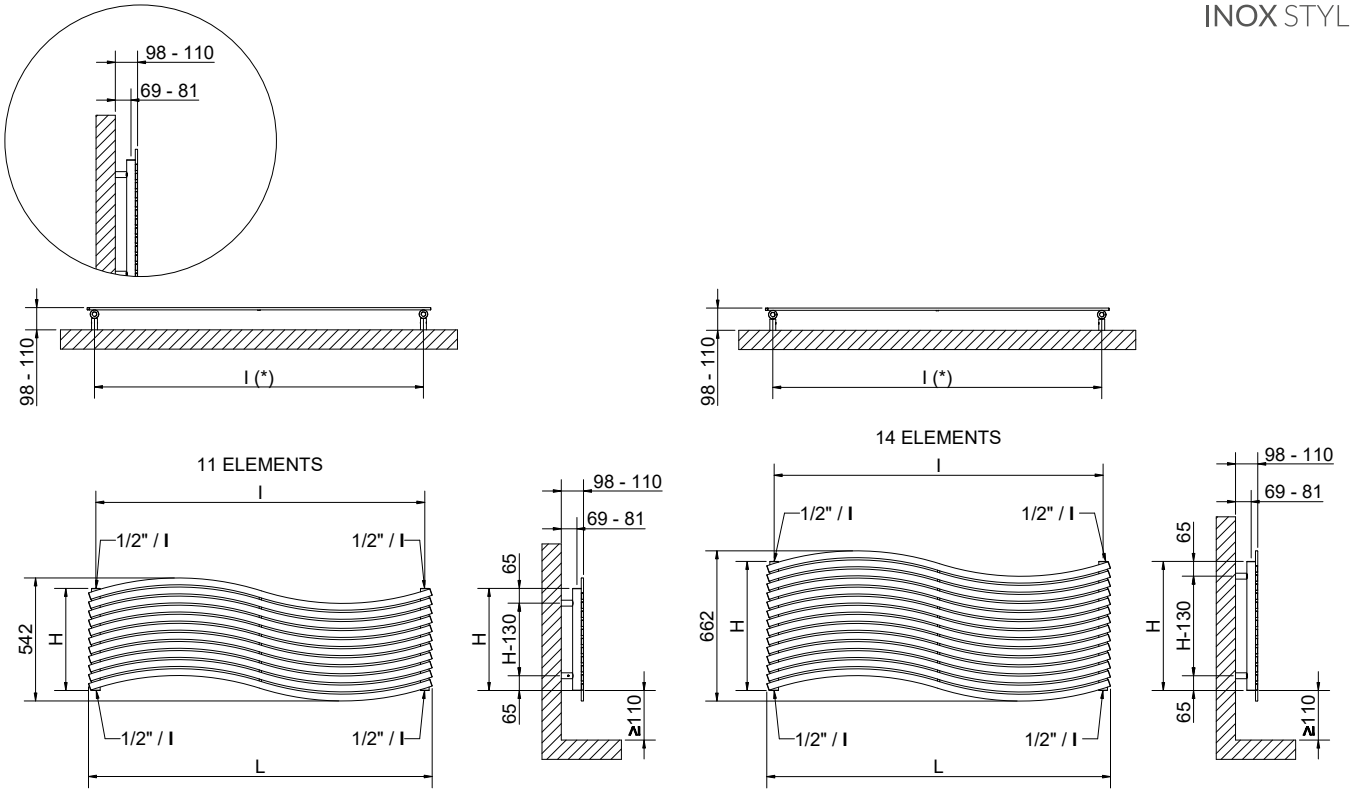

(*) The fixing kit has the same pipe centre (I) as the radiator

Standard connections

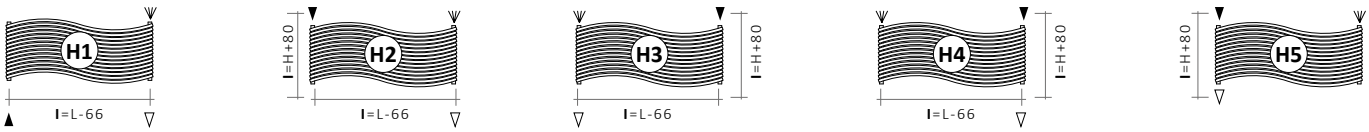

Special connection

Indicate the pipe centres **X**



Always specify the kind of connection needed when ordering (from H1 to H7).

Legend = ► In ▷ Out ⋞ Airvent **H** Height **I** Pipe Centres **L** Width ▭ Connection

LOLA® HORIZONTAL - SATIN STAINLESS STEEL

Art. Nr.	Variant	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
		H [mm]	L [mm]	I [mm]	[Kg]	[m²]	[lt]	**Δt = 50°C**	Δt = 30°C	
3551740000001	H1	**450**	1516	1450	15,5	1,45	4,1	549	287	1,2712
3551740000013		**570**	1516	1450	19,0	1,84	5,1	698	363	1,2804
3551740000106	H2	**450**	1516	-	15,5	1,45	4,1	549	287	1,2712
3551740000064		**570**	1516	-	19,0	1,84	5,1	698	363	1,2804
3551740000094	H3	**450**	1516	-	15,5	1,45	4,1	549	287	1,2712
3551740000093		**570**	1516	-	19,0	1,84	5,1	698	363	1,2804
3551740000027	H4	**450**	1516	530	15,5	1,45	4,1	549	287	1,2712
3551740000061		**570**	1516	650	19,0	1,84	5,1	698	363	1,2804
3551740000063	H5	**450**	1516	530	15,5	1,45	4,1	549	287	1,2712
3551740000070		**570**	1516	650	19,0	1,84	5,1	698	363	1,2804
3551740000036	H6	**450**	1516	390	15,5	1,45	4,1	549	287	1,2712
3551740000085		**570**	1516	510	19,0	1,84	5,1	698	363	1,2804
3551740000067	H7	**450**	1516	390	15,5	1,45	4,1	549	287	1,2712
3551740000082		**570**	1516	510	19,0	1,84	5,1	698	363	1,2804

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n