LOLA® VERTICAL

SATIN STAINLESS STEEL

3D TRADEMARK

10 YEARS WARRANTY

MATERIAL:
Horizontal collectors in satin stainless steel with Ø of 38 mm.
Curved heating elements in satin stainless steel 30x10 mm.

FIXING KIT:
Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:
The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:
It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES

P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2”- n° 1 G 1/8”

AWARD

GOLD VILLA
AWARD

ACCESSORIES

Elegant manual square satin valve

Copper connection Ø 12/14/15
Art. Nr. 5991990320209

Multilayer connection Ø 16 x2
Art. Nr. 5991990320208

Elegant square satin valve kit pipe centres 50 mm with thermostatic head - right

Copper connection Ø 12/14/15
Art. Nr. 5991990320201

Multilayer connection Ø 16 x2
Art. Nr. 5991990320200

Kit 2 hooks satin stainless steel

Art. Nr. 5991990010224

V9÷V10



Measures for Elegant square manual valve

V7÷V8



V11



Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

Pipe covering kit for satin valves

Art. Nr. 5103000000045

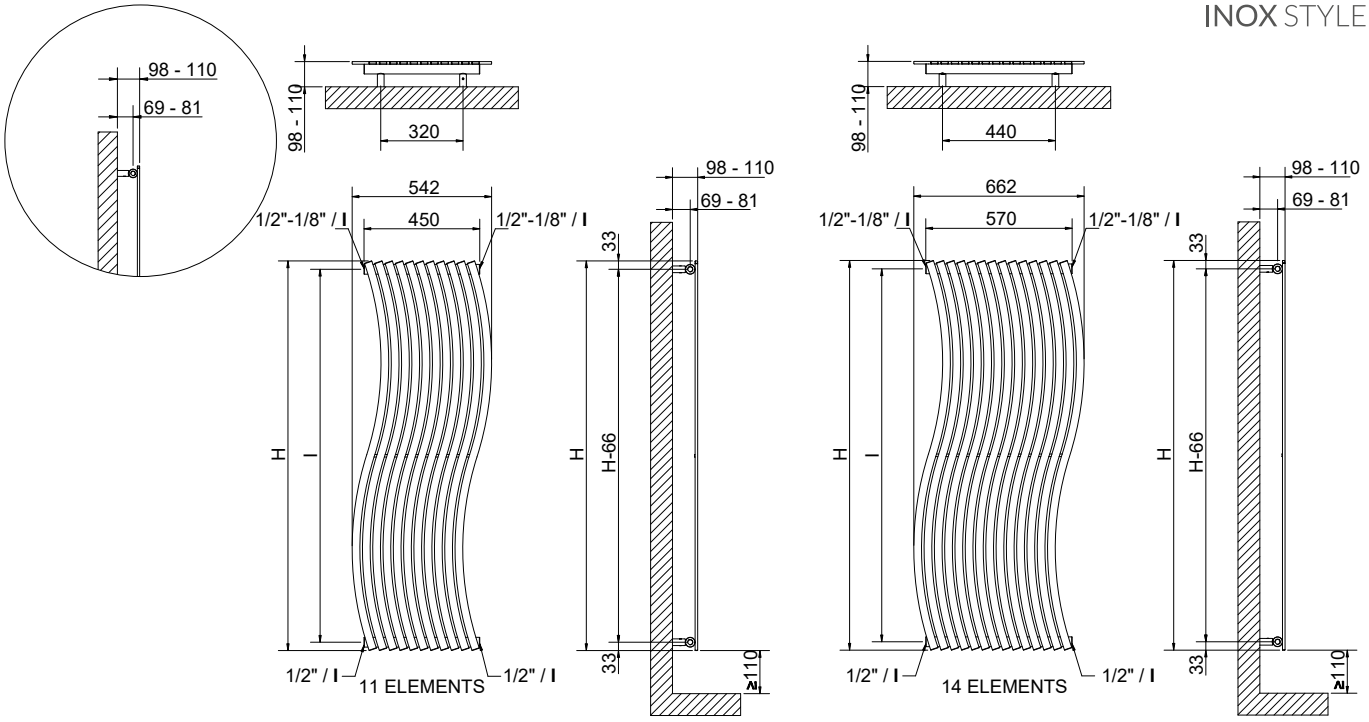

Standard connections

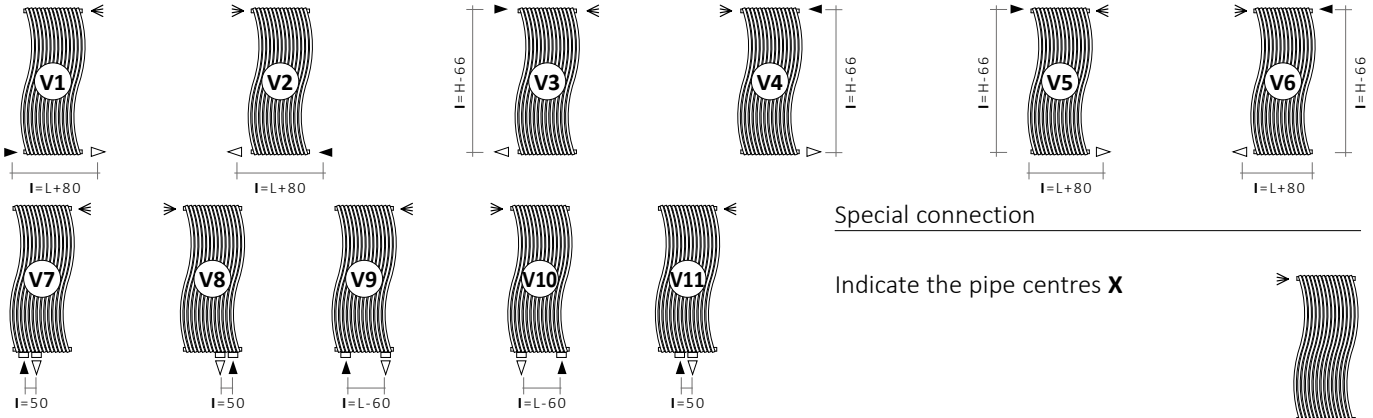

Always specify the kind of connection needed when ordering (from V1 to V11).

Legend = ► In ▷ Out ⋞ Airvent **H** Height **I** Pipe Centres **L** Width ▭ Connection

Special connection

Indicate the pipe centres **X**

LOLA® VERTICAL - SATIN STAINLESS STEEL

Art. Nr.	Variant	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
		H [mm]	L [mm]	I [mm]	[Kg]	[m²]	[lt]	**Δt = 50°C**	Δt = 30°C	
3551740130001	V1	**1516**	450	530	15,5	1,45	4,1	557	289	1,2811
3551740130002			570	650	19,0	1,84	5,1	708	365	1,2940
3551740000016	V2	**1516**	450	530	15,5	1,45	4,1	557	289	1,2811
3551740000062			570	650	19,0	1,84	5,1	708	365	1,2940
3551740000069	V3	**1516**	450	1450	15,5	1,45	4,1	557	289	1,2811
3551740000047			570	1450	19,0	1,84	5,1	708	365	1,2940
3551740000019	V4	**1516**	450	1450	15,5	1,45	4,1	557	289	1,2811
3551740000023			570	1450	19,0	1,84	5,1	708	365	1,2940
3551740000077	V5	**1516**	450	-	15,5	1,45	4,1	557	289	1,2811
3551740000103			570	-	19,0	1,84	5,1	708	365	1,2940
3551740000104	V6	**1516**	450	-	15,5	1,45	4,1	557	289	1,2811
3551740000105			570	-	19,0	1,84	5,1	708	365	1,2940
3551740000054	V7	**1516**	450	50	15,5	1,45	4,1	557	289	1,2811
3551740000030			570	50	19,0	1,84	5,1	708	365	1,2940
3551740000039	V8	**1516**	450	50	15,5	1,45	4,1	557	289	1,2811
3551740000011			570	50	19,0	1,84	5,1	708	365	1,2940
3551740000040	V9	**1516**	450	390	15,5	1,45	4,1	557	289	1,2811
3551740000012			570	510	19,0	1,84	5,1	708	365	1,2940
3551740000037	V10	**1516**	450	390	15,5	1,45	4,1	557	289	1,2811
3551740000022			570	510	19,0	1,84	5,1	708	365	1,2940
3551740000008	V11	**1516**	450	50	15,5	1,45	4,1	557	289	1,2811
3551740000038			570	50	19,0	1,84	5,1	708	365	1,2940

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n