



# SFERE TRITTICO

design **Simone Micheli**

**PATENTED**



**5 YEARS WARRANTY**

### MATERIAL:

Super slim heating body in painted mild steel.

### FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.

The fixing kit is compliant with VDI 6036 norm, class 4.

### VALVE KIT INCLUDES (ONLY FOR STANDARD VERSION):

Valves with thermostatic head  
Fittings for copper pipe (Ø 12/14/15)  
Fittings for multilayer pipe (Ø 16 x2)  
Ready- to install pipe connection kit

**FOR WALL-FIT VERSION THE VALVES MUST BE PURCHASED SEPARATELY.**

### PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

### PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2). Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

### COLORS:

Radiators and accessories: standard white R01 color. For other colors see color chart.

## PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

## AWARD



## ACCESSORIES





### Manual wall-fit valves



WALL-FIT VALVES  
Art. Nr. 5991990311226

Fitting for wall-fit valves  
Copper connection Ø 12/14/15  
Art. Nr. 5991170300001

Fitting for wall-fit valves  
Multilayer connection Ø 16 x2  
Art. Nr. 5991170300002

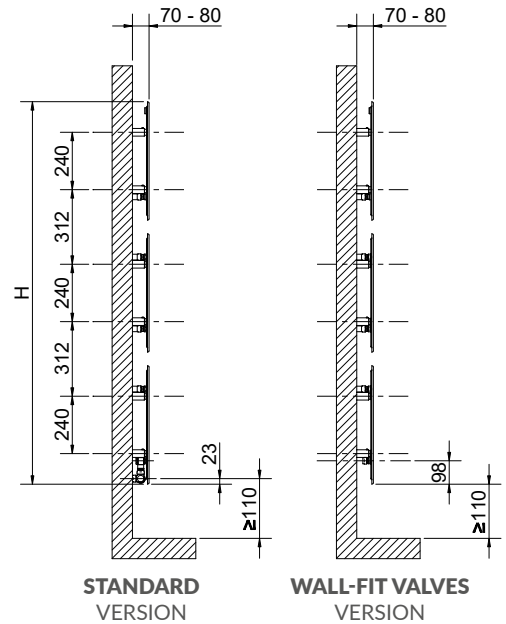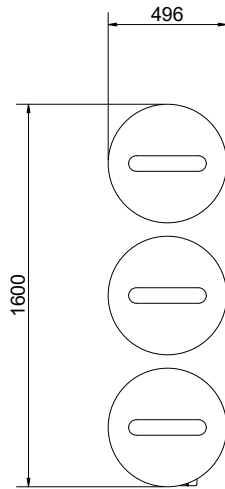


## BUILT-IN CONNECTIONS FOR SFERE TRITTICO



TUTORIAL  
INSTALLING  
THE CONNECTION KIT

Version with PIPE CENTRES 50 mm



## SFERE TRITTICO COMPLETE WITH WALL-FIT HYDRAULIC CONNECTION

Art. Nr.	Diameter D [mm]	Pipe Centres l [mm]	Dry Weight [Kg]	Surface [m <sup>2</sup> ]	Water Content [lt]	Thermal output Watt		Exponent n
						$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
<b>STANDARD VERSION</b> 3540806100221	<b>496</b>	50	24,3	1,2	0,9	582	316	1,195
<b>VERSION FOR WALL-FIT VALVES</b> 3540806100226	<b>496</b>	50	24,3	1,2	0,9	582	316	1,195

Art. Nr. referred to white R01 color- version.

The Art. Nr. of the standard version, is inclusive of **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

The Art. Nr. of the wall fit version includes only **2 X 1/2" CONNECTIONS**; valves to be ordered separately.

## SFERE TRITTICO WITHOUT WALL-FIT HYDRAULIC CONNECTION

Art. Nr.	Diameter D [mm]	Pipe Centres l [mm]	Dry Weight [Kg]	Surface [m <sup>2</sup> ]	Water Content [lt]	Thermal output Watt		Exponent n
						$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
<b>STANDARD VERSION</b> 3540806100227	<b>496</b>	50	24,3	1,2	0,9	582	316	1,195
<b>VERSION FOR WALL-FIT VALVES</b> 3540806100228	<b>496</b>	50	24,3	1,2	0,9	582	316	1,195

Art. Nr. referred to white R01 color- version.

The Art. Nr. of the standard version, is inclusive of **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

The Art. Nr. of the wall fit version includes only **2 X 1/2" CONNECTIONS**; valves to be ordered separately.

## WITH BUILT-IN CONNECTIONS

Art. Nr.

5102001100001

For output at different  $\Delta t$  than  $50^{\circ}\text{C}$ , please refer to the following formula = desired output = output at  $\Delta t 50^{\circ}\text{C}$  x (desired  $\Delta t/50$ )<sup>n</sup>