



WINDOW® ELECTRIC

design **Beatrice De Sanctis**



EUROPEAN WARRANTY

MATERIAL:

Heating body and handle in ultra-thin painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The fixing kits are compliant with VDI 6034 norm, class 4.

FEATURES:

The exclusive design of the Window towel warmer combines aesthetics and functionality.

The heated handle can be extracted, acting as support for warming the towels. The opening and closing of the handle are manually operated. Window has been designed to offer maximum comfort of use by differentiating the temperature of the handle from that of the body.

The temperature of the handle is kept lower than that of the radiator body, so to allow a safe grip without sacrificing the maximum heat output provided by the radiator body at the normal operating temperatures of the heating system.

PACKAGING:

The radiator is protected with a film in polyethylene and cardboard box. Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2). Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.

For other colours see colour chart.

For the two-color versions the price is shown in the table.

Electrical resistors: CLASS 2

Minimum class protection: IP 44

Seasonal energy efficiency η_s : $\geq 38\%$

Control: Power unit + Digital chrono thermostat in radio frequency

Wire Length: 1000 mm with Schuko plug

PRODUCT CERTIFICATES




AWARD



HOW TO PLACE ELECTRIC RADIATORS

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.


In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.



BICOLOR

BODY	FRAME	BODY	FRAME	BODY	FRAME
F30 WHITE SAND	F36 TERRA	T20 WHITE GREY	T17 ACAI MATT	F25 QUARTZ DUST	F23 SPARKLING GREY

Color matching available.

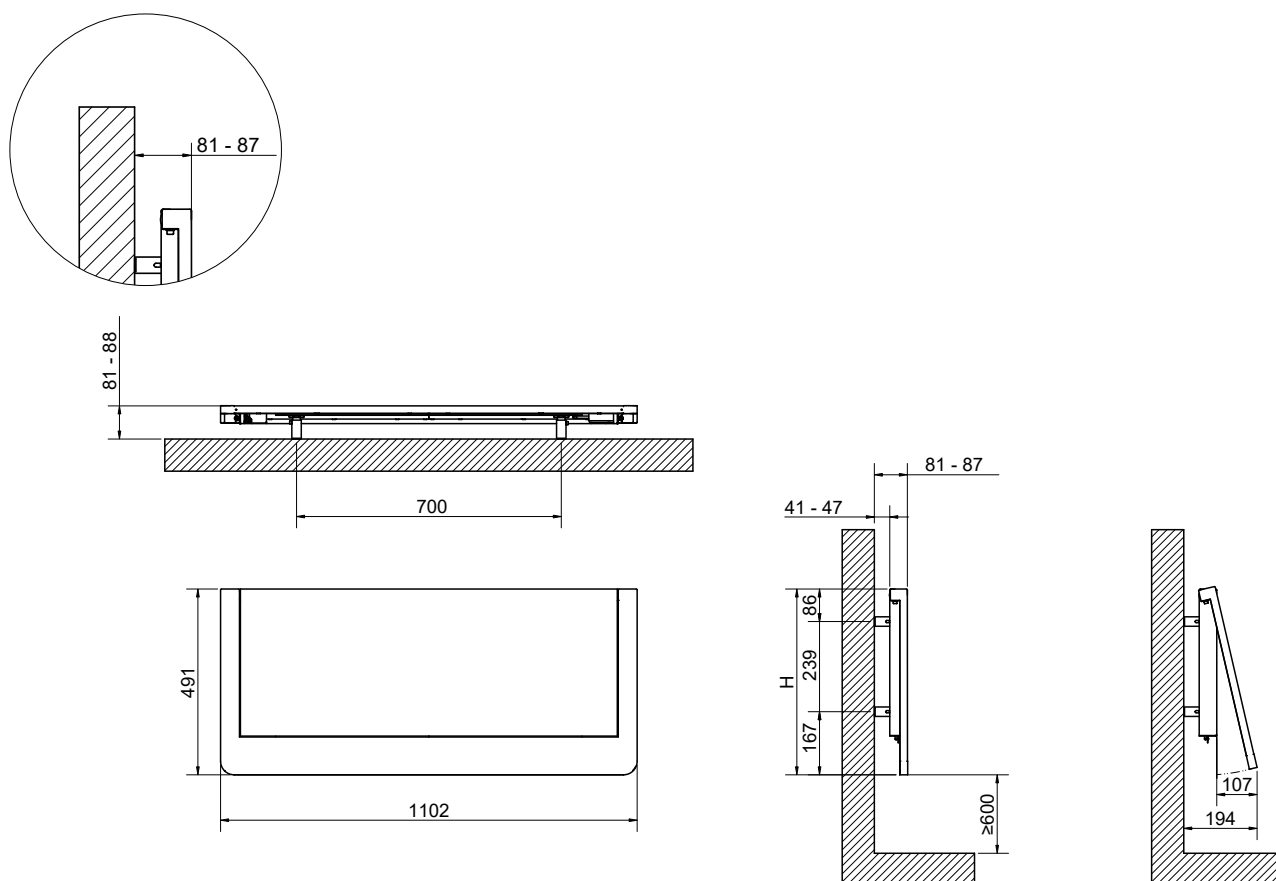

WINDOW[®] ELECTRIC

Art. Nr.	Height		Width	Thermal output	Peso
	H [mm]	L [mm]	Watt	Kg	
DIGITAL CHRONOTHERMOSTAT KIT IN RADIOFREQUENCY SCHUKO PLUG 230V 50HZ CLASS 2					
3581420002002	495	1100	454	18	

Art. Nr. are referred to WHITE R01 colour version.

WINDOW[®] BICOLOR ELECTRIC

Art. Nr.	Colore		Height	Width	Thermal output	Peso
	BODY	FRAME	H [mm]	L [mm]	Watt	Kg
DIGITAL CHRONOTHERMOSTAT KIT IN RADIOFREQUENCY SCHUKO PLUG 230V 50HZ CLASS 2						
3581420002004	F30	F36	495	1100	454	18
3581420002005	T20	T17				
3581420002006	F25	F23				

REMOTE-CONTROL



- WEEKLY AND DAILY PROGRAMMING
- OPEN WINDOW SENSOR
- OPERATING MODE SELECTION (AUTO, COMFORT, ECO, FROST PROTECTION)
- BOOST (FORCED START)
- INDICATION OF ENERGY CONSUMPTION

- LOCK / UNLOCK
- LOCK / UNLOCK WITH PIN
- AMBIENT TEMPERATURE LIMITATION
- SURFACE TEMPERATURE LIMITATION
- POSSIBILITY TO CONTROL UP TO 5 DEVICES