



# YARA

**PATENTED**

**EUROPEAN  
WARRANTY**

**MATERIAL:**

Vertical collector in painted carbon steel 90x30 mm.  
Horizontal heating elements in painted carbon steel  $\varnothing$  18 mm.

**FIXING KIT:**

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.  
The kit is certified from TÜV in compliance with VDI 6036-class 4.

**PACKAGING:**

The radiator is protected by a film in polyethylene and with a carton box.  
User notice included.

**PAINTING PROCESS:**

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).  
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

**COLOURS:**

Radiator and accessories: standard white colour R01.

## PRODUCT CERTIFICATES



Pression maximale de service: 5 bar

Température maximale de service: 110° C


Available for central heating systems

Connexions: n° 2 x 1/2" gaz - n° 2 x 1/2" gaz

## AWARD



## REVERSIBLE

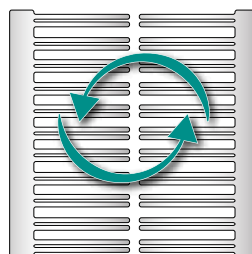

## ACCESSORIES



**Elegant square manual valve kit painted pure white R01**

Copper connection  $\varnothing$  12/14/15  
Art. Nr. 5991990310553

Multilayer connection  $\varnothing$  16  
Art. Nr. 5991990310552



**Elegant square pipe centres 50 mm valve kit painted pure white R01 with thermostatic head - right**

Copper connection  $\varnothing$  12/14/15  
Art. Nr. 5991990310543

Multilayer connection  $\varnothing$  16  
Art. Nr. 5991990310542



**Tinta valve pipe centres 50 mm with thermostatic head - right**

Copper connection  $\varnothing$  12/14/15  
Art. Nr. 5991990311217

Multilayer connection  $\varnothing$  16  
Art. Nr. 5991990311216



**Elegant with thermostatic head square pure white R01 painted valve kit**




Copper connection  $\varnothing$  12/14/15  
Art. Nr. 5991990310539

Multilayer connection  $\varnothing$  16  
Art. Nr. 5991990310538



**Sleeving kit for Pipe Centres 50 mm - valves polished**

Art. Nr. 5103000000057

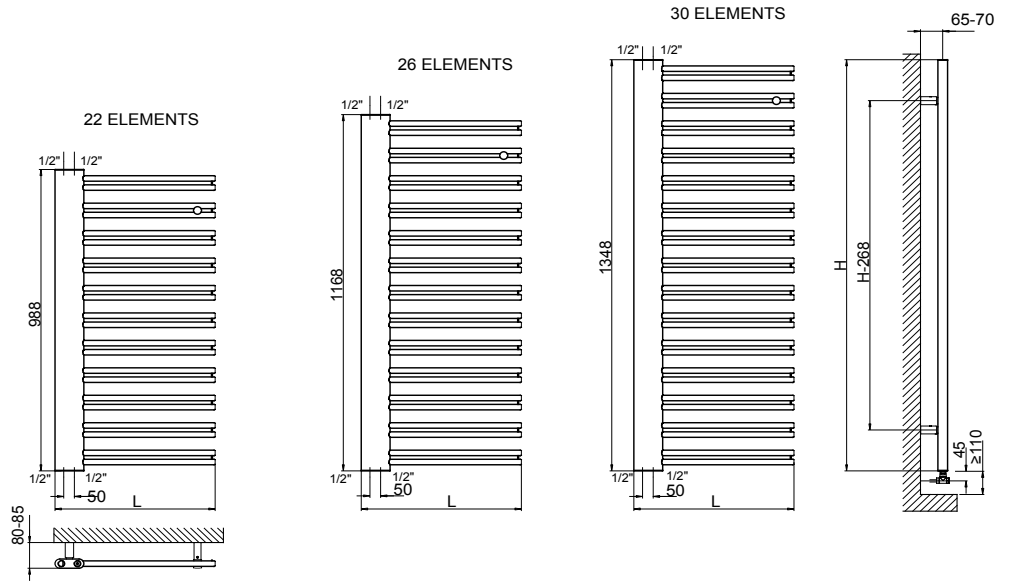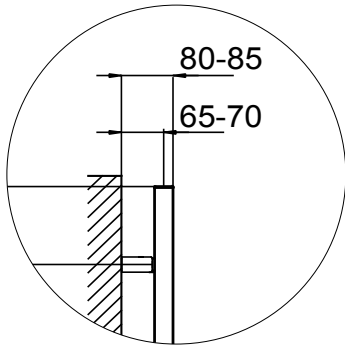

## YARA

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	I [mm]	[Kg]	[m <sup>2</sup> ]	[lt]	$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3551436101001	<b>988</b>	500	50	16,4	0,8	3,8	465	246	1,2466
3551436101002	<b>1168</b>	500	50	19,4	0,9	4,4	557	292	1,2646
3551436101003	<b>1348</b>	500	50	22,4	1,0	5,1	613	319	1,2786

Art. Nr. are referred to colour WHITE R01 version.

For output at different  $\Delta t$  than  $50^{\circ}\text{C}$ , please refer to the following formula: desired output = output at  $\Delta t 50^{\circ}\text{C}$  x (desired  $\Delta t/50$ )<sup>n</sup>