



# MOVIE®

design **Mariano Moroni**

**5 YEARS  
WARRANTY**

#### **MATERIAL:**

Super slim heating body in painted carbon steel.

#### **FIXING KIT:**

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

#### **VALVE KIT INCLUDES:**

Valves

Fittings for copper pipe (Ø 12/14/15)

Fittings for multilayer pipe (Ø 16 x2)

#### **PACKAGING:**

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

#### **PAINTING PROCESS:**

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

#### **COLOURS:**

Radiators and accessories: standard white R01 colour.

For other colours see colour chart.

## PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 2 x G 1/2"

## AWARD






## COMFORT & DESIGN NOMINÉ

## ACCESSORIES




**Liquid thermostatic head  
- polished**


Art. Nr. 5035270710002

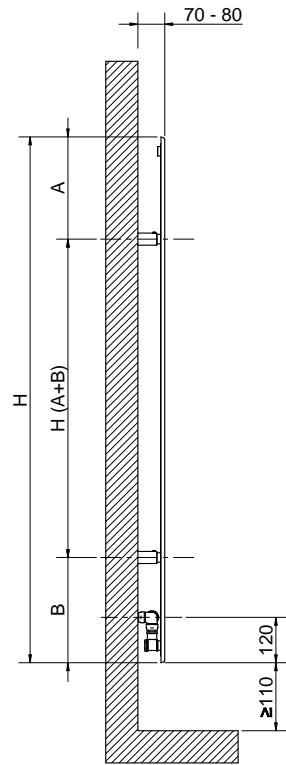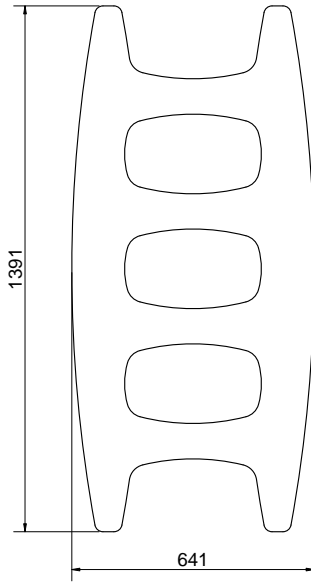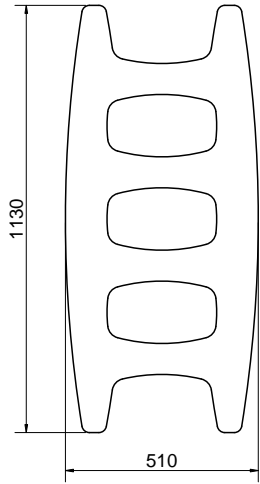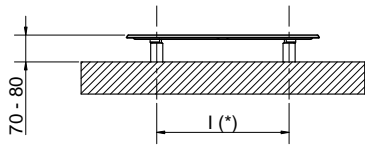

THERMOSTATIC HEAD positioning (optional)



CONNECTION detail



H [mm]	A [mm]	B [mm]	l (*) [mm]
<b>1130</b>	240	235	350
<b>1392</b>	270	280	350

## MOVIE®

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	l [mm]	[Kg]	[m <sup>2</sup> ]	[lt]	Δt = 50°C	Δt = 30°C	
3540806100002	<b>1130</b>	510	360 ÷ 400	15	0,6	1,1	385	209	1,1958
3540806100001	<b>1392</b>	642	450	18	0,92	1,3	559	300	1,2202

Art. Nr. are referred to WHITE R01 colour version.

Art. Nr. is inclusive of **VALVE AND HOLDER**.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)<sup>n</sup>