RIO®

POLISHED STAINLESS STEEL

design **Paola Pinnavaia**

10 YEARS WARRANTY

MATERIAL:
Horizontal collectors in polished stainless steel with Ø of 38 mm.
Vertical heating elements in polished stainless steel with Ø of 25 mm.

FIXING KIT:
Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:
The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:
It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES

P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 4 x G 1/2”

AWARD

D COME DESIGN

ACCESSORIES

Elegant corner dx with thermostatic head polished valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990301079

Multilayer connection Ø 16 x2
Art. Nr. 5991990301077

Elegant reverse manual polished valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990301082

Multilayer connection Ø 16 x2
Art. Nr. 5991990301081

Elegant square polished manual valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990301084

Multilayer connection Ø 16 x2
Art. Nr. 5991990301083



Measures for valves type Cordivari Elegant Corner with thermostatic head



Measures for Elegant reverse manual valve

Pipe covering kit for polished valves

Art. Nr. 5103000000044



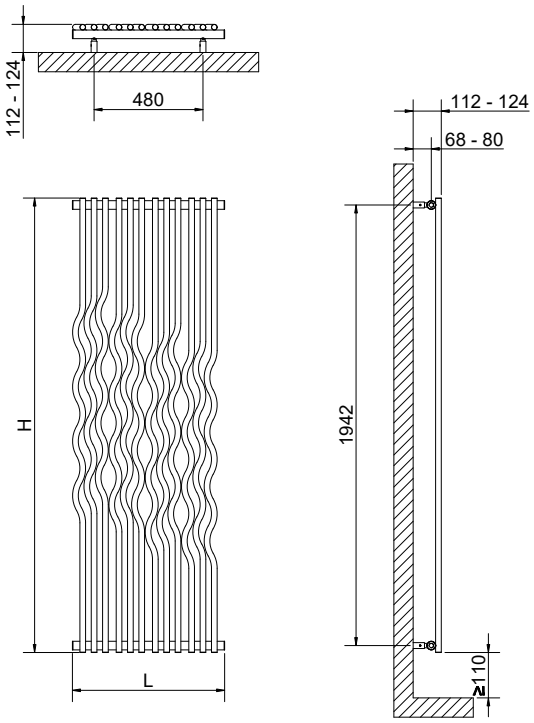

Standard connections

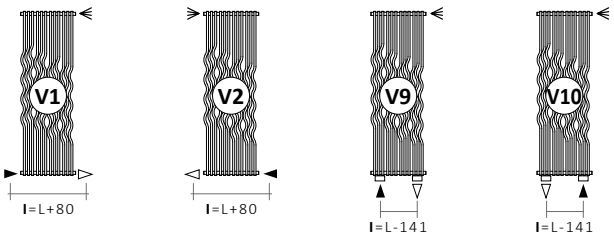

Always specify the kind of connection needed when ordering (V1- V2 and V9- V10).

Legend = ► In ▷ Out ⋞ Airvent **H** Height **I** Pipe Centres **L** Width ▭ Connection

RIO® POLISHED STAINLESS STEEL

Art. Nr.	Variant	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
		H [mm]	L [mm]	I [mm]	[Kg]	[m²]	[lt]	**Δt = 50°C**	Δt = 30°C	
3620750400001	V1	**2000**	671	751	26	2,38	16,6	807	424	1,2581
3620750000001	V2	**2000**	671	751	26	2,38	16,6	807	424	1,2581
3620750000004	V9	**2000**	671	530	26	2,38	16,6	807	424	1,2581
3620750000005	V10	**2000**	671	530	26	2,38	16,6	807	424	1,2581

Pipe Centres refers to the radiator valves Elegant Cordivari.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n